


DA14580的OTP烧录注意事项

2021-05-19

记录自己烧录OTP的一些注意事项

1.烧录image

注意vpp供给6.8v

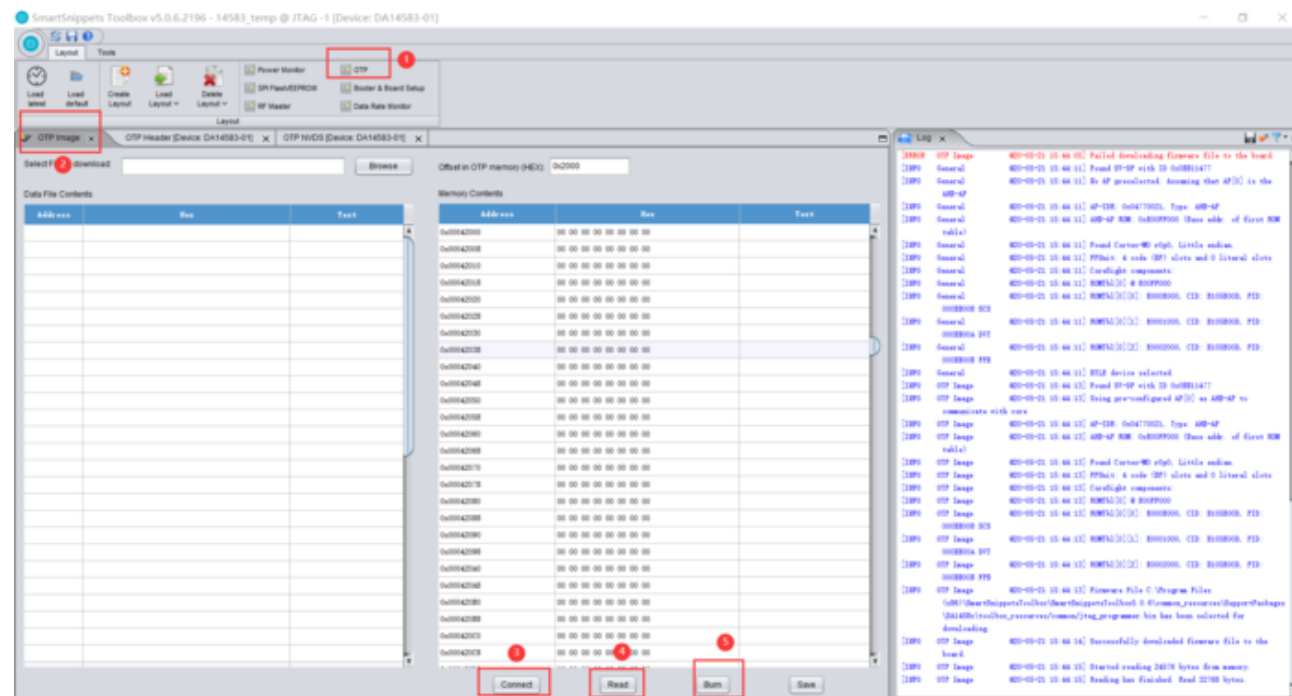

2.烧录header

猜你喜欢

[DA14585无flash需要通过OTA烧录](#) 2021-10-25

[OTP](#) 2022-12-23

[otp的原理](#) 2022-01-21

[OTP详解](#) 2022-12-23

[FLASH OTP](#) 2022-12-23

[OTP【转】](#) 2022-12-23

[DA14580 OTA](#) 2021-10-06

相关资源

[基于jQuery的模仿的QQ投票](#) 2022-12-24


Application Flag 1和Application Flag 2设置为yes

32Khz source selection根据实际设置，我这里使用的是RC32Khz。也可以程序内设置好。

Remapping Flag设置为OTP remapped to 0

DMA length 设置为 1FFF

JTAG enable flag最好设置为enable

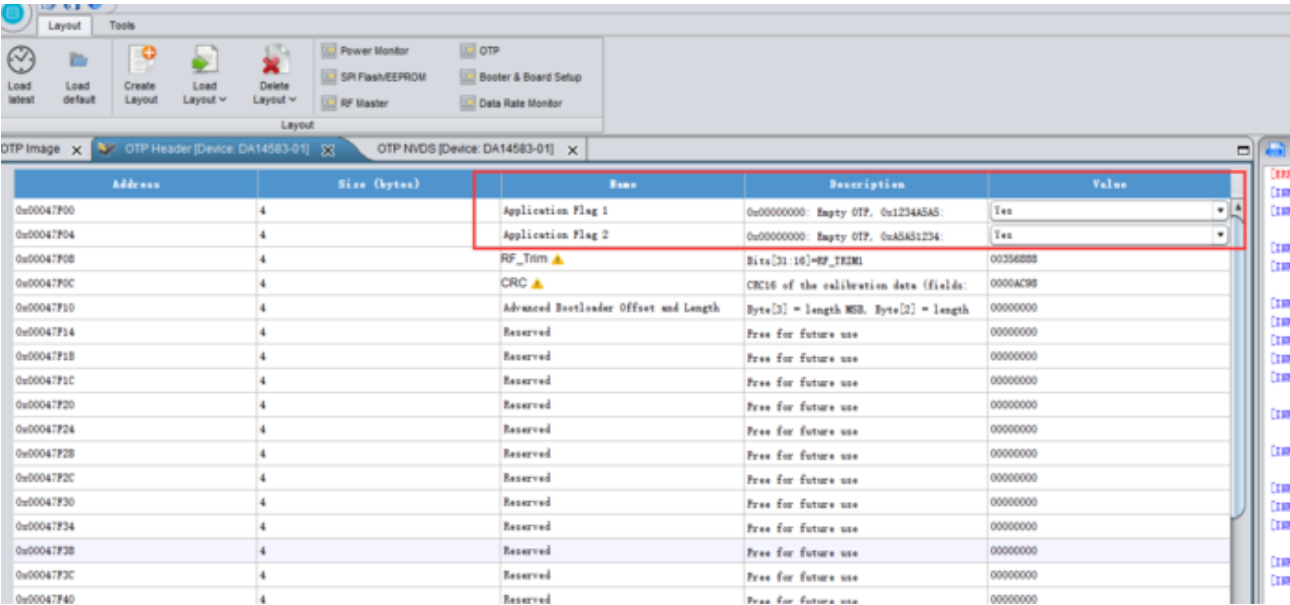

Address	Size (bytes)	Name	Description	Value
0x00047F00	4	Application Flag 1	0x00000000: Empty OTP, 0x12345678	Yes
0x00047F04	4	Application Flag 2	0x00000000: Empty OTP, 0x12345678	Yes
0x00047F08	4	RF_Trim	Bits[31:16]=RF_TRIM	00368888
0x00047F0C	4	CRC	CRC16 of the calibration data (fields:	0000AC98
0x00047F10	4	Advanced Bootloader Offset and Length	Byte[3] = length MSB, Byte[2] = length	00000000
0x00047F14	4	Reserved	Free for future use	00000000
0x00047F18	4	Reserved	Free for future use	00000000
0x00047F1C	4	Reserved	Free for future use	00000000
0x00047F20	4	Reserved	Free for future use	00000000
0x00047F24	4	Reserved	Free for future use	00000000
0x00047F28	4	Reserved	Free for future use	00000000
0x00047F2C	4	Reserved	Free for future use	00000000
0x00047F30	4	Reserved	Free for future use	00000000
0x00047F34	4	Reserved	Free for future use	00000000
0x00047F38	4	Reserved	Free for future use	00000000
0x00047F3C	4	Reserved	Free for future use	00000000
0x00047F40	4	Reserved	Free for future use	00000000

基于jQuery的类似iphone的密码2022-12-19

基于Flash的实现图标导航2023-01-24

ECshop的联行支付的支付2023-01-21

jQuery实现的拥有大气的定2021-06-05

相似解决方案

UIWindow 的 rootViewCon2013-07-16

架构注意事项2010-11-16

init 方法的注意事项1970-01-01

ngUpgrade 性能注意事项2017-01-24

SCIM 安全注意事项1970-01-01

并行化注意事项1970-01-01

OOGenerics 设计注意事项1970-01-01

django: 布局注意事项1970-01-01

事件订阅的性能注意事项2012-12-16

cgSceneGraph 1.4.2 的一些2013-02-05

Address	Size (bytes)	Name	Description	Value
0x4768	4	Tester	Bits[7:2]=Tester_ID	000000AB
0x476C	4	Position	Byte3: LOT, Byte2: Wafer, Byte1: Y	00000000
0x4770	4	Package Used	0x00 = TLCSP34, 0xAA = QP840, 0x55 =	QP840
0x4774	4	320Hz source selection	0x00: XTAL320Kz, 0xAA: RC320Kz	RC320Kz
0x4778	4	Calibration Flag	Bit[31:16]: 0xASAS, Bit5: Trim_VCO_Cal	ASAS002B
0x477C	4	LNA Trim Values	LNA Trim Values	07427210
0x4780	4	RFIO capacitance Trim Values	RFIO capacitance Trim Values	00000000
0x4784	4	BandGap Trim Values	BandGap Trim Values	00002800
0x4788	4	RC16MHz Trim Values	RC16MHz Trim Values	00000008
0x478C	4	XTAL16MHz Trim Values	XTAL16MHz Trim Values	00000000
0x4790	4	VCO Trim Values	VCO Trim Values	00000004
0x4794	4	Customer Code Signature	Hash Signature of Code	00000000
0x4798	4	Customer Code Signature	Hash Signature of Code	00000000
0x479C	4	Customer Code Signature	Hash Signature of Code	00000000
0x47A0	4	Customer Code Signature	Hash Signature of Code	00000000
0x47A4	4	Customer Code Signature	Hash Signature of Code	00000000
0x47A8	4	Customer Code Signature	Hash Signature of Code	00000000
0x00047FC0	4	Customer Code Signature	Hash Signature of Code	00000000
0x00047FC4	4	Customer Code Signature	Hash Signature of Code	00000000
0x00047FC8	4	Customer Code Signature	Hash Signature of Code	00000000
0x00047FCC	4	Customer Code Signature	Hash Signature of Code	00000000
0x00047FD0	4	Signature Algorithm	0x00 : None, 0xAA: MD5, 0x55: SHA-1,	None
0x00047FD4	4	Device unique ID	Device number (written as a string of	00000000
0x00047FD8	4	Device unique ID	Device number (written as a string of	00000000
0x00047FDC	4	Custom Fields	Custom Fields	00000000
0x00047FE0	4	Custom Fields	Custom Fields	00000000
0x00047FE4	4	Custom Fields	Custom Fields	00000000
0x00047FE8	4	Custom Fields	Custom Fields	00000000
0x00047FFC	4	Custom Fields	Custom Fields	00000000
0x00047FF0	4	Custom Fields	Custom Fields	00000000
0x00047FF4	4	Remapping Flag	0x00: STAP remapped to 0, 0xAA: OTP	OTP remapped to 0
0x00047FF8	4	DMA Length	Number of 32-bit words, 0x2000 words	00001FFF
0x00047FFC	4	JTAG enable flag	0x0: Enable, 0xAA: Disable	Enable

来源网络，如有侵犯到您的权益请联系进行下架处理

热门标签

[Java](#) [Python](#) [linux](#)

[javascript](#) [Mysql](#) [C#](#)

[Docker](#) [算法](#) [前端](#)

[SpringBoot](#) [Redis](#) [Vue](#)

[spring](#) [.net core](#) [设计模式](#)

[.net](#) [kubernetes](#) [c++](#)

[数据库](#) [数据结构](#) [大数据](#)

[js](#) [微服务](#) [机器学习](#)

[Android](#) [Go](#) [程序员](#) [面试](#)

[JVM](#) [人工智能](#) [云原生](#)

[ASP.net core](#) [后端](#) [CSS](#)

[git](#) [PHP](#) [golang](#) [k8s](#)

[Django](#) [深度学习](#) [Nginx](#)

[mybatis](#) [React](#) [多线程](#)

相关文章：

[camera otp介绍](#)

2021-07-05 [devops](#) [架构](#) [云计算](#) [爬虫](#)

[理解erlang_OTP的思想](#)

2022-01-17 [Spring Boot](#) [LeetCode](#)

[DA14580 底层IO操作](#)

2021-05-20

[几个不错的java otp 包](#)

2021-09-17

[Erlang/OTP 中文手册](#)

2022-12-23

[理解Erlang/OTP - Application](#)

2022-12-23

[Raspberry Pi读取OTP](#)

2022-12-23

[DA14580发送数据的隐患](#)

2022-12-23