



链滴

MYSQL 1045 Access denied for user ''''root''''@''''localhost'''' 解决方案

作者: [yang17762622](#)

原文链接: <https://ld246.com/article/1541151274264>


来源网站: 链滴

许可协议: [署名-相同方式共享 4.0 国际 \(CC BY-SA 4.0\)](#)

最近数据库集体异常？今天又一个服务器出问题，看log

```
java.sql.SQLException: Access denied for user 'root'@'localhost' (using password: YES)
  at com.mysql.jdbc.SQLException.createSQLException(SQLException.java:1074)
  at com.mysql.jdbc.MysqlIO.checkErrorPacket(MysqlIO.java:4074)
  at com.mysql.jdbc.MysqlIO.checkErrorPacket(MysqlIO.java:4006)
  at com.mysql.jdbc.MysqlIO.checkErrorPacket(MysqlIO.java:919)
  at com.mysql.jdbc.MysqlIO.proceedHandshakeWithPluggableAuthentication(MysqlIO.java:
694)
  at com.mysql.jdbc.MysqlIO.doHandshake(MysqlIO.java:1244)
  at com.mysql.jdbc.ConnectionImpl.coreConnect(ConnectionImpl.java:2397)
  at com.mysql.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:2430)
  at com.mysql.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:2215)
  at com.mysql.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:813)
  at com.mysql.jdbc.JDBC4Connection.<init>(JDBC4Connection.java:47)
  at sun.reflect.GeneratedConstructorAccessor273.newInstance(Unknown Source)
  at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAcce
sorImpl.java:45)
  at java.lang.reflect.Constructor.newInstance(Constructor.java:423)
  at com.mysql.jdbc.Util.handleNewInstance(Util.java:411)
  at com.mysql.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:399)
  at com.mysql.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:334)
  at com.alibaba.druid.filter.FilterChainImpl.connection_connect(FilterChainImpl.java:148)
  at com.alibaba.druid.filter.stat.StatFilter.connection_connect(StatFilter.java:211)
  at com.alibaba.druid.filter.FilterChainImpl.connection_connect(FilterChainImpl.java:142)
  at com.alibaba.druid.pool.DruidAbstractDataSource.createPhysicalConnection(DruidAbstrac
DataSource.java:1377)
  at com.alibaba.druid.pool.DruidAbstractDataSource.createPhysicalConnection(DruidAbstrac
DataSource.java:1431)
  at com.alibaba.druid.pool.DruidDataSource$CreateConnectionThread.run(DruidDataSourc
ava:1844)
```

Navicat报错信息如下：

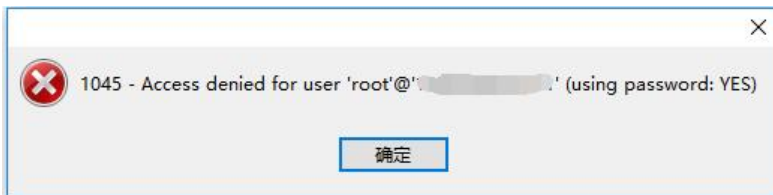

好吧，MYSQL大爷又闹脾气了，能咋办，整呗。

解决方案 (Linux)

1. 停mysql服务

```
/etc/init.d/mysqld stop
或
service mysqld stop
```

2. 进入mysql安装目录bin/ 使用safe模式，进行重启(后面这一段 `--skip-grant-tables` 不是注释哦，行完毕ctrl+z跳出)

`./mysqld_safe --skip-grant-tables`

3.进入mysql, 此时已经不会验证密码了, 随便输入一个就能进

`mysql -uroot -p`

```
[root@localhost bin]# mysql -uroot -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 17
Server version: 5.6.36-log MySQL Community Server (GPL)

Copyright (c) 2000, 2017, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

4.修改密码(为了方便, 我后面又改回原密码了QAQ)

`use mysql`

`update user set password=PASSWORD("你的密码") where User ='root';`

好啦, 再试一下MYSQL是不是已经好了呢

分享使我快乐!!!