



链滴


# MySQL 8.0 新特性使用 Navicat 连接错误 报 2059 错误 - (记录)

作者: [Jacklinsir](#)

原文链接: <https://ld246.com/article/1568267204336>

来源网站: [链滴](#)

许可协议: [署名-相同方式共享 4.0 国际 \(CC BY-SA 4.0\)](#)

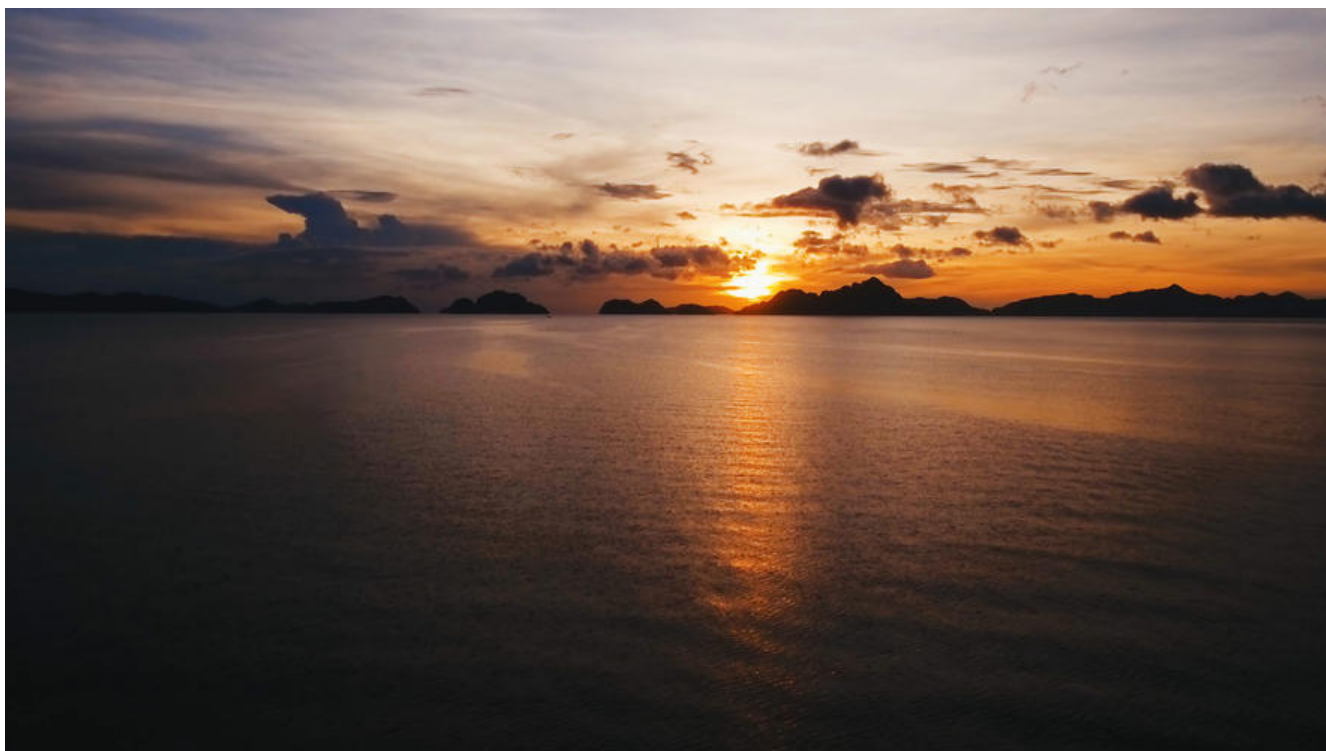

## 错误提示



## 解决方案

使用控制台登入mysql，然后使用命令 **use mysql** 切换到 mysql数据库。

执行命令如下：

```
use mysql;
```

```
select user,plugin from user where user='root';
```

可以看到当前用户的加密方式如下

```
mysql> use mysql;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> select user,plugin from user where user='root';
+-----+-----+
| user | plugin |
+-----+-----+
| root | caching_sha2_password |
| root | caching_sha2_password |
+-----+-----+
```

然后执行如下命令修改加密方式:

```
alter user 'root'@'%' identified with mysql_native_password by '111qqq';
```

将用户的加密方式改为mysql\_native\_password。


```
mysql> alter user 'root'@'%'
-> identified with mysql_native_password by '111qqq'
-> ;
Query OK, 0 rows affected (0.09 sec)

mysql> select user,plugin from user where user='root';
+-----+-----+
| user | plugin                |
+-----+-----+
| root | mysql_native_password |
| root | caching_sha2_password |
+-----+-----+
```

最后执行刷新权限命令:

```
flush privileges;
```

测试连接结果如下: 连接成功!

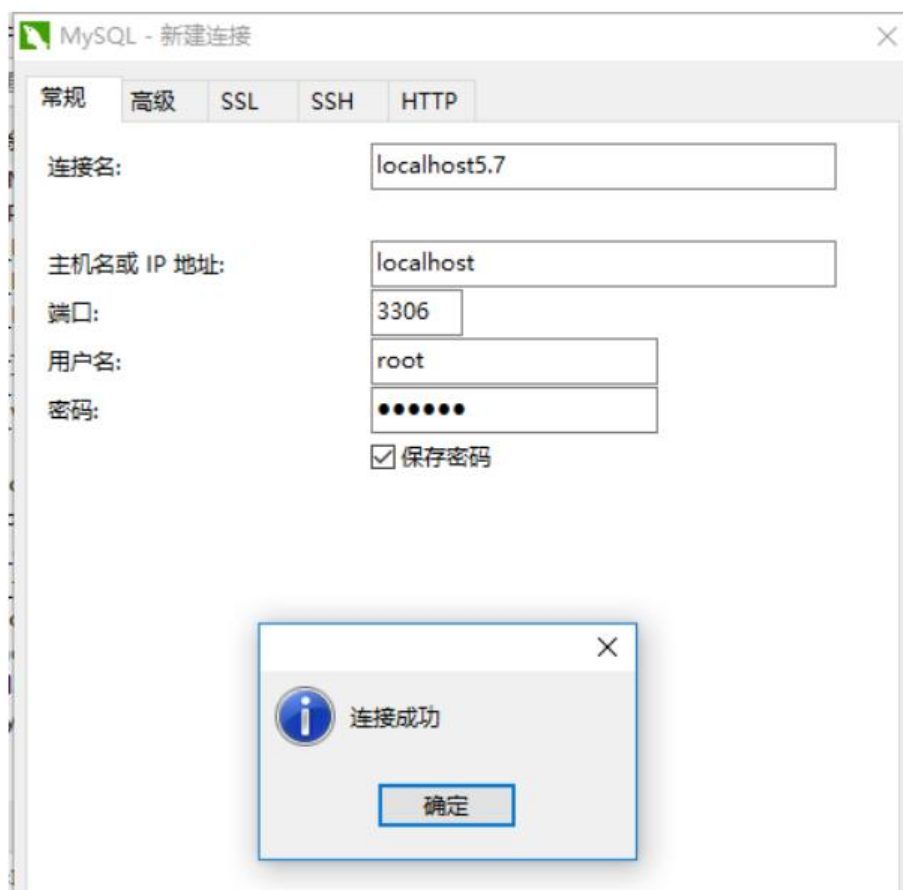

以上解决方案小编亲测, 如有问题请留言评论, 谢谢阅读!