



概述

□

□

Solo介绍

Docker部署方式

一、安装Mysql

MySQL Community Downloads

MySQL Community Server

General Availability (GA) Releases



MySQL Community Server 8.0.18

Select Operating System:

Linux - Generic

Looking for previous GA versions?

Select OS Version:

All



Generic Linux Minimal tarballs excludes debug binaries, and regular binaries are stripped

**Linux - Generic (glibc 2.12) (x86, 32-bit),
Compressed TAR Archive**

8.0.18

470.9M

[Download](#)

(mysql-8.0.18-linux-glibc2.12-i686.tar.xz)

MD5: 02260e999d18e73b92534e36dca67771 | [Signature](#)

**Linux - Generic (glibc 2.12) (x86, 64-bit),
Compressed TAR Archive**

8.0.18

480.5M

[Download](#)

```
[root@iZbp10ytux699mbk3fn9zmZ mysql]# mkdir data
[root@iZbp10ytux699mbk3fn9zmZ mysql]# ll
total 468
drwxr-xr-x  2 mysql mysql  4096 Apr 18 11:32 bin
drwxr-xr-x  2 root  root   4096 Apr 18 11:32 data
drwxr-xr-x  2 mysql mysql  4096 Apr 18 11:32 docs
drwxr-xr-x  2 mysql mysql  4096 Apr 18 11:32 include
```

```
mysql#
mysql# bin/mysqld --initialize --user=mysql --basedir=/usr/local/mysql --datadir=/usr/local/mysql
file or directory
mysql# bin/mysqld --initialize --user=mysql --basedir=/usr/local/mysql --datadir=/usr/local/mysql
0 [Warning] [MY-011070] [Server] 'Disabling symbolic links using --skip-symbolic-links (or equivalent)
is not recommended. Please see 'Disabling Symbolic Links' in the MySQL Manual for more details.'
0 [System] [MY-013169] [Server] /usr/local/mysql/bin/mysqld (mysqld 8.0.13) initializing of server
5 [Note] [MY-010454] [Server] A temporary password is generated for root@localhost: 2uoPF=dSs#7#
0 [System] [MY-013170] [Server] /usr/local/mysql/bin/mysqld (mysqld 8.0.13) initializing of server
```

```
[root@iZbp10ytux699mbk3fn9zmZ local]#  
[root@iZbp10ytux699mbk3fn9zmZ local]# chkconfig --add mysql  
[root@iZbp10ytux699mbk3fn9zmZ local]#  
[root@iZbp10ytux699mbk3fn9zmZ local]# chkconfig --list mysql  
-bash: chkconfig--list: command not found  
[root@iZbp10ytux699mbk3fn9zmZ local]#  
[root@iZbp10ytux699mbk3fn9zmZ local]#  
[root@iZbp10ytux699mbk3fn9zmZ local]# chkconfig --list mysql  
mysql          0:off  1:off  2:on   3:on   4:on   5:on   6:off
```

```
include ld.so.conf.d/*.conf
/usr/local/mysql/lib
```

```
for i in /etc/profile.d/*.sh ; do
  if [ -r "$i" ]; then
    if [ "${-#*i}" != "$-" ]; then
      . "$i"
    else
      . "$i" >/dev/null 2>&1
    fi
  fi
done

unset i
unset -f pathmunge

#MYSQL ENVIRONMENT
export PATH=$PATH:/usr/local/mysql/bin:/usr/local/mysql/lib
```

```
[root@iZbp10ytux699mbk3fn9zmZ data]# mysql -uroot -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 8.0.13

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.


mysql>
mysql>
mysql>
mysql> alter user 'root'@'localhost' identified by 'Kuaigui2019!'
-> ;
```

登录mysql


输入刚才生成的密码

修改数据的密码

```
[root@iZbp10ytux699mbk3fn9zmZ data]#
[root@iZbp10ytux699mbk3fn9zmZ data]# service mysql restart
Shutting down MySQL... [ OK ]
Starting MySQL.. [ OK ]
```

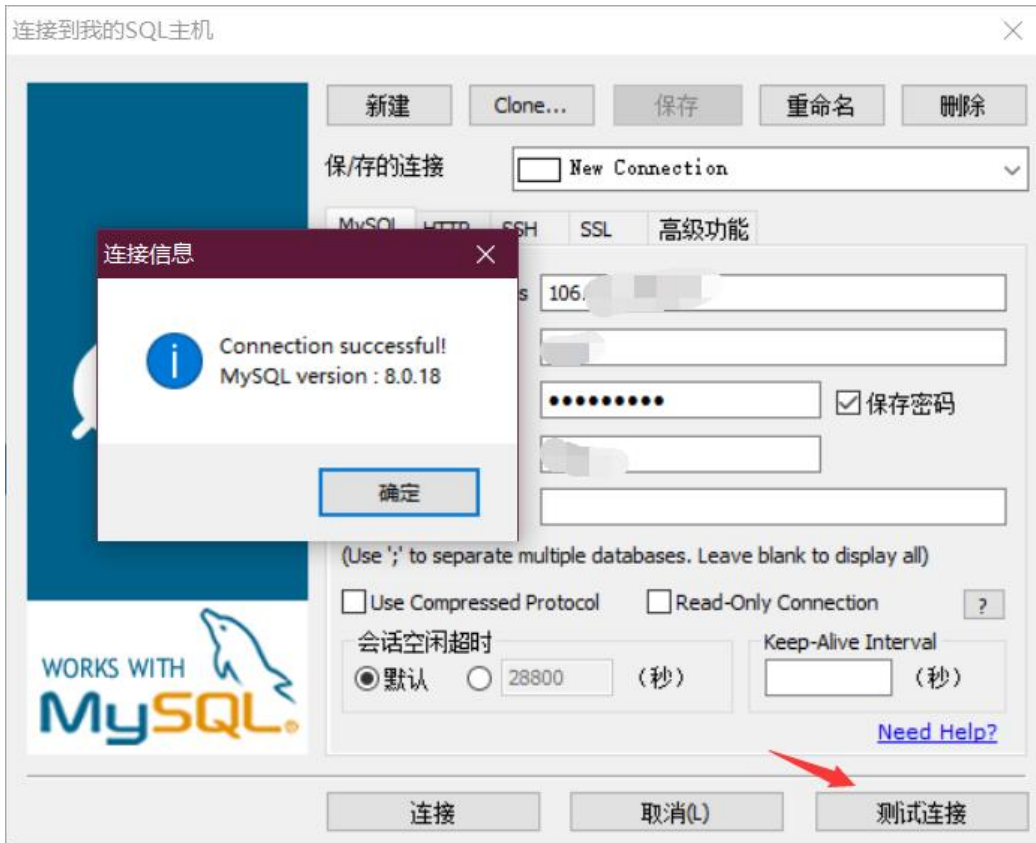

二、 Docker配置

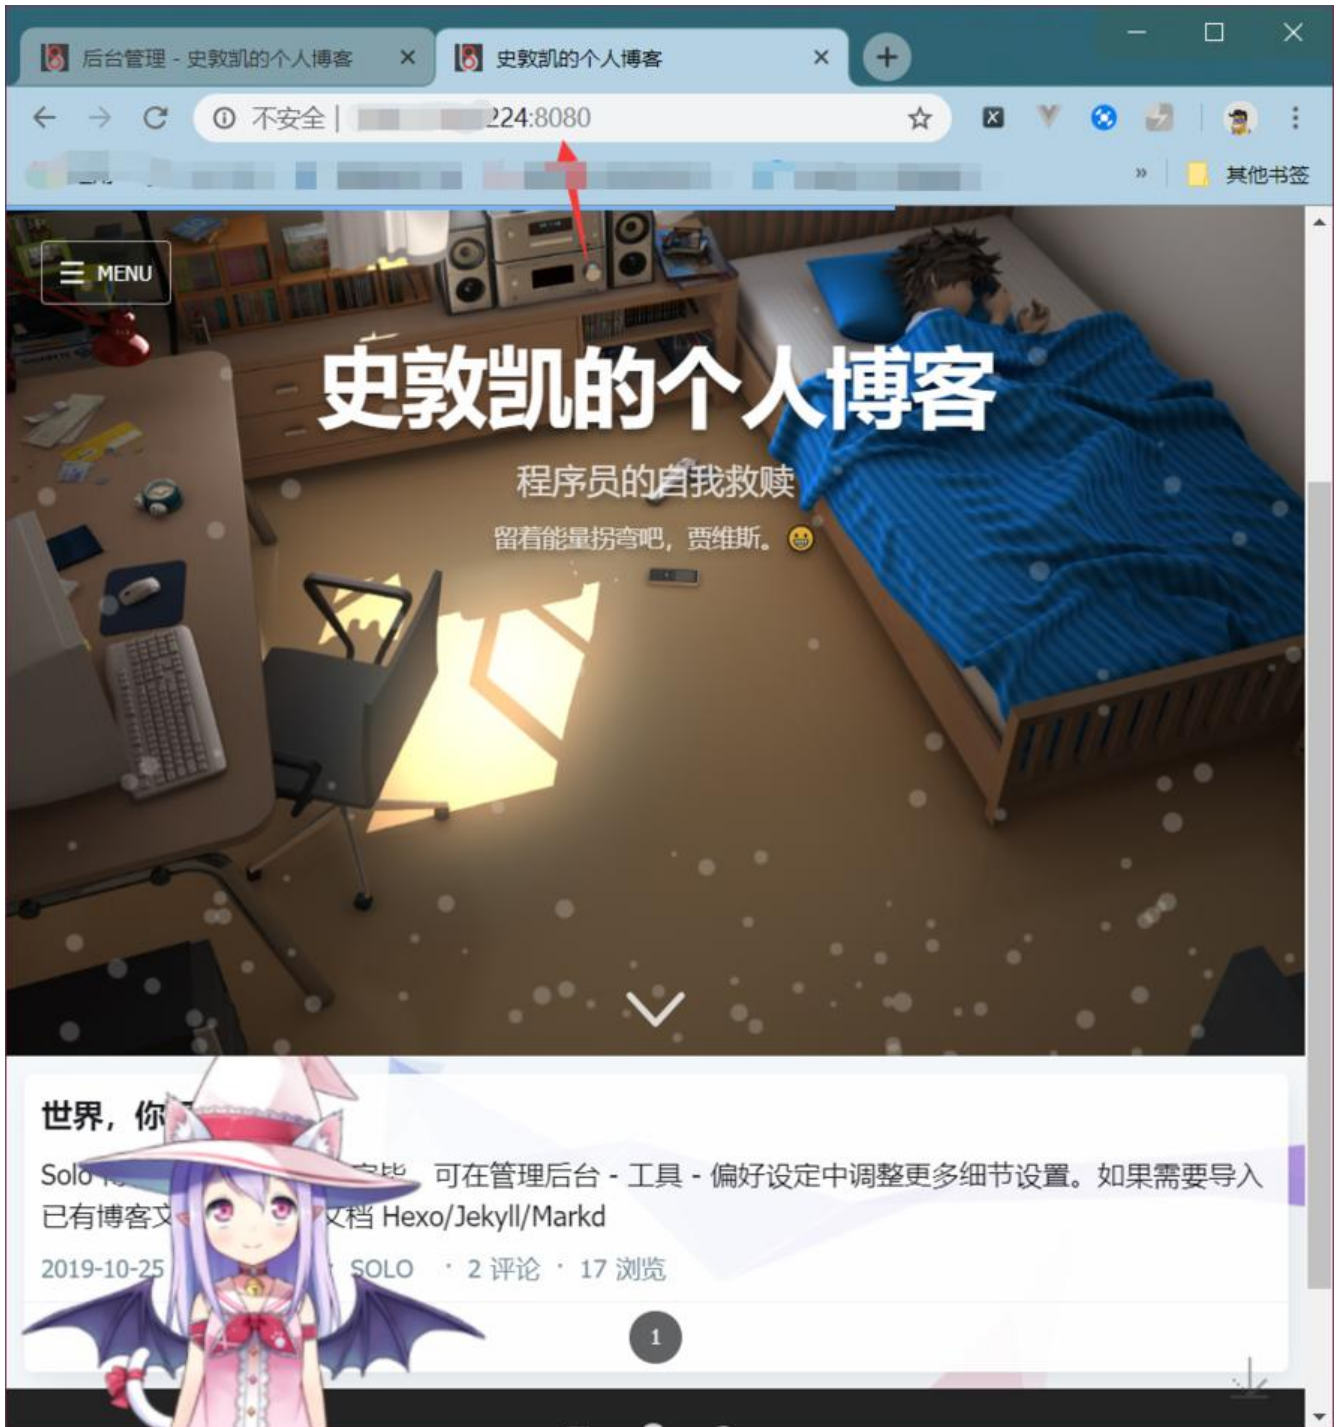

三、nginx反向代理，静态代理配置




史敦凯的个人博客

程序员的自我救赎

留着能量拐弯吧，贾维斯。😄

!

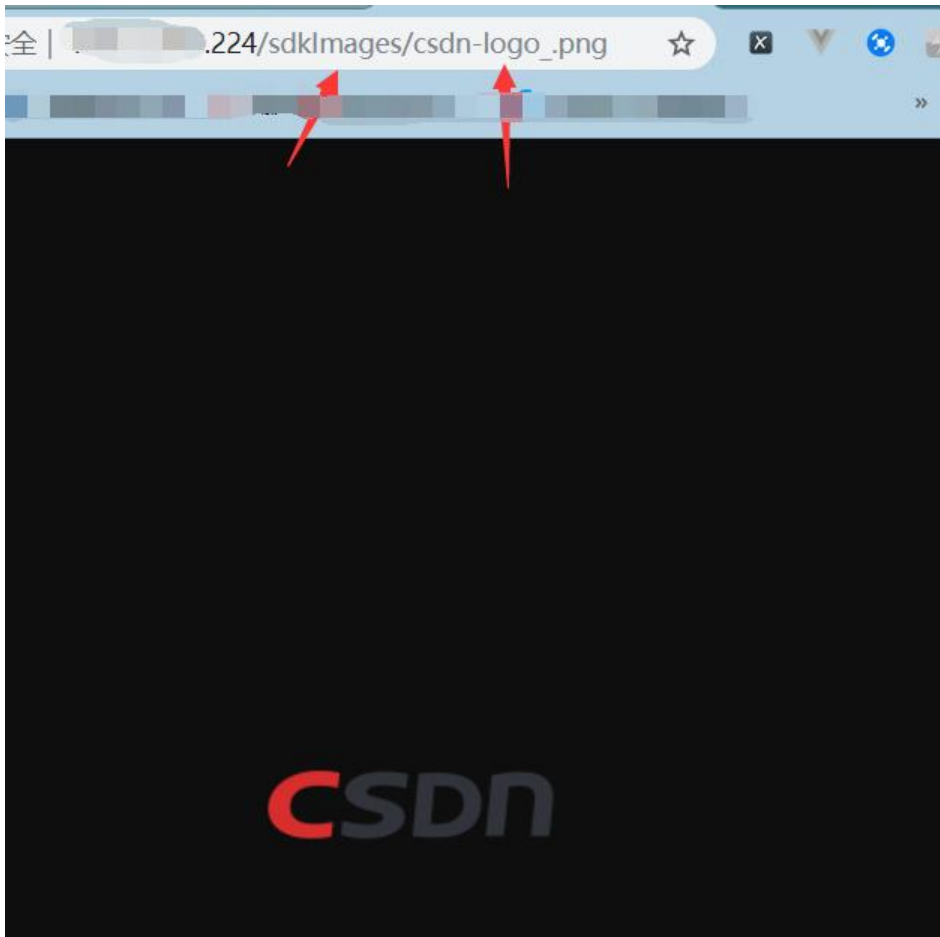

链接图标地址:

[http://\[redacted\].224/sdkImages/qqhead.jpg](http://[redacted].224/sdkImages/qqhead.jpg)



00