链滴

ES 集成 SpringBoot

作者：yscxy

原文链接：https://ld246.com/article/1605166189264

来源网站：

许可协议：

打开

官网在这里

点击 Elasticsearch Clients

这时候我们就看到了这个页面

Docs

Elasticsearch Clients

- Java REST Client [7.9] — other versions
- JavaScript API [7.x] — other versions
- Ruby API [7.x] — other versions
- Go API [7.x] — other versions
- .NET API [7.x] — other versions
- PHP API [7.x] — other versions
- Perl API
- Python API [7.x] — other versions
- eland
- Rust API
- Java API (deprecated) [7.9] — other versions
- Community Contributed Clients

Most Popular

Get Started with Elasticsearch

ELK for Logs & Metrics

Intro to Kibana

我们一般使用restclient

- Java REST Client [7.9] — other versions ←
- JavaScript API [7.x] — other versions
- Ruby API [7.x] — other versions
- Go API [7.x] — other versions
- .NET API [7.x] — other versions
- PHP API [7.x] — other versions
- Perl API
- Python API [7.x] — other versions
- eland
- Rust API
- Java API (deprecated) [7.9] — other versions
- Community Contributed Clients

Most Popular

Get Started with Elasticsearch

ELK for Logs & Metrics

Intro to Kibana

原生依赖

```
<repositories>
  <repository>
    <id>es-snapshots</id>
    <name>elasticsearch snapshot repo</name>
    <url>https://snapshots.elastic.co/maven/</url>
  </repository>
</repositories>
```
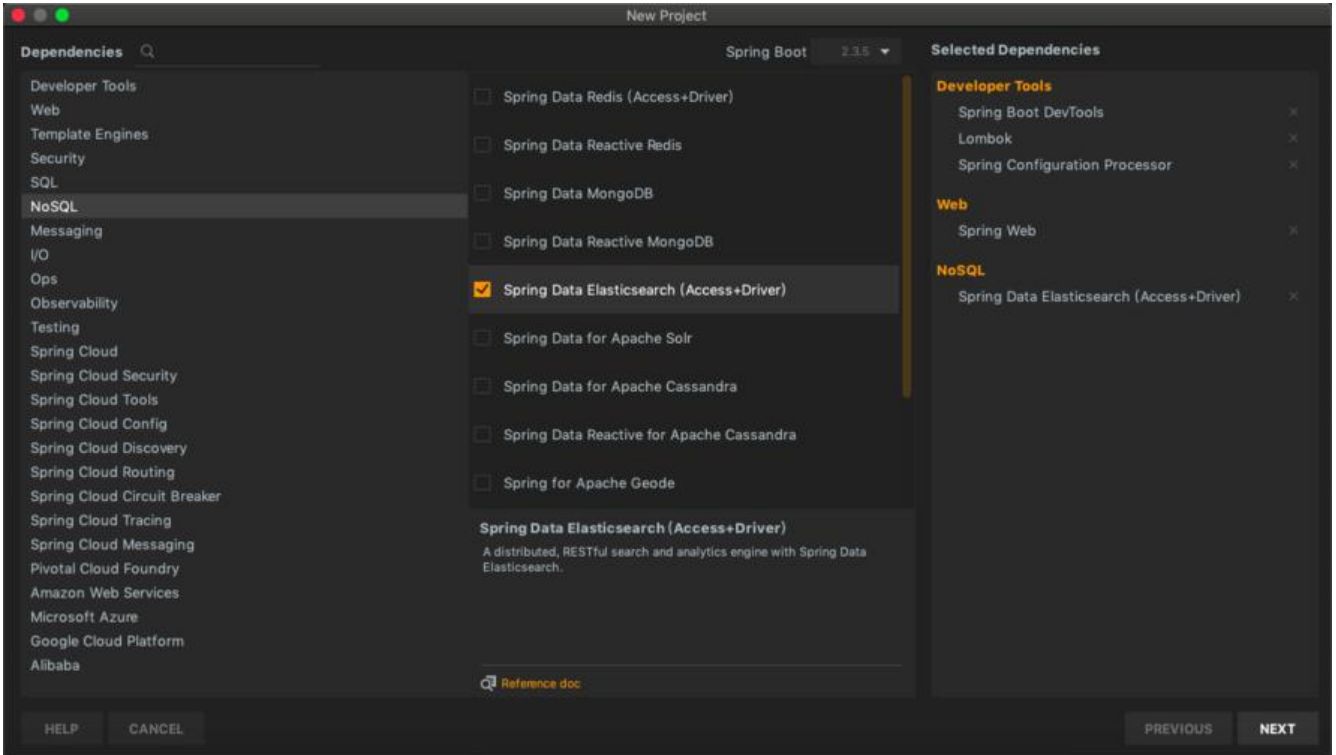
初始化

```
RestHighLevelClient client = new RestHighLevelClient(
    RestClient.builder(
        new HttpHost("localhost", 9200, "http"),
        new HttpHost("localhost", 9201, "http")));
```

用完一定记得关闭对象

```
client.close();
```

原文链接：ES 集成 SpringBoot

配置基本的项目

问题：一定要保证导入的依赖和运行版本一样

新建一个配置类

```java
@Configuration
public class EsClientConfig {

    @Bean
    public RestHighLevelClient restHighLevelClient(){
        RestHighLevelClient client = new RestHighLevelClient(RestClient.builder(
                new HttpHost("localhost", 9200, "http")
        ));
        return client;
    }
}
```

到此我们的ES集成SpringBoot就完成了。